



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH

Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany

Phone: +49 (0) 7306 96 65 0

Fax: +49 (0) 7306 96 65 50

E-mail: info@smg-machines.com



TurfSoft - Maintenance
TurfSoft TS2 / TS2E



TurfSoft - Maintenance

TurfSoft TS2 / TS2E



Item number/s:

6400050 / TS2

6400249 / TS2E

Machine for the cleaning and care of artificial turf.

TurfSoft TS2 is a solution as simple as effective for the joy in the game and maintaining the value of small areas with non-infilled and infilled surfaces (sand and sand/rubber). Using this machine you can eliminate suspended particles, abrasion and dirt particles from the top surfaces. The manoeuvrable TurfSoft is ideal for areas with little space to move, where stairs, steps and narrow doorways complicate the access to the artificial turf pitches.

TurfSoft is equipped with a petrol engine which controls three functions at the same time: the vibrating function of the sieve, the drive of the turbine and the rotation of the cleaning brush. With light pressure on the steering arm the brush steps into the turf and through the emerging feed it causes an easy and energy-saving operation.

You can easily clean the filter by turning the handwheel.

SMG dust filters installed by SMG comply with DIN EN60335-2-69/dust class "M" and EN779 "F8" or "F9". Dust with a high proportion of fines as well as granulate/fibre abrasion (microplastics) are extracted via the powerful turbine and bound in the filter.

TurfSoft - Maintenance

TurfSoft TS2 / TS2E

Detail views




Compact

Foldable steering arm and 360° swivable wheels to pass doors.



Safety

Side wheel to avoid collisions on walls.

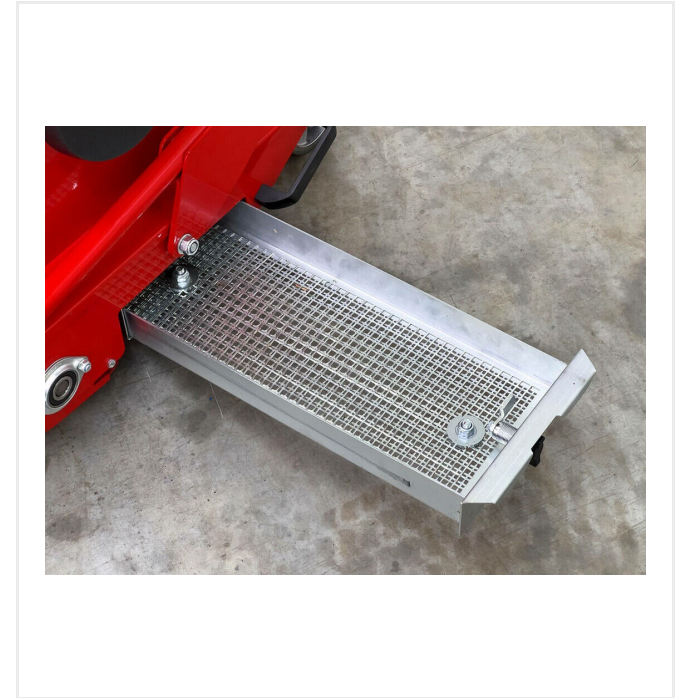


4 - 10 mm

SMG adjustable sieve for every particle size.

TurfSoft - Maintenance

TurfSoft TS2 / TS2E

Detail views

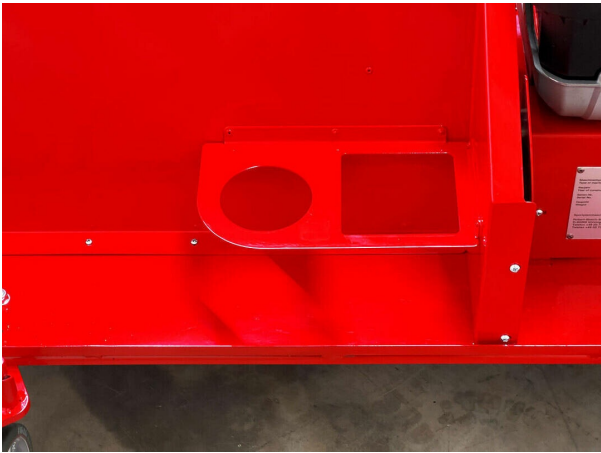

Comfort

Cup holder and bracket for tools.



SMG dust filter

Dust filter comply with DIN EN60335-2-69/dust class "M" and EN779 "F8" or "F9".



TurfSoft TS2E Akku

Coming soon.

82 volt, 3.6 kW (4,9 ch), 5AH accu
(optional with 8AH accu)

TurfSoft - Maintenance

TurfSoft TS2 / TS2E

Technical information

Drive	TS2: 1-cylinder petrol engine / 2,6 kW (3,5 HP) TS2E: 1,5 kW (2,0 HP)
Working width	800 mm
Weight	TS2: 80 kg TS2E: 85 kg
Dimensions	L 1,130 x W 995 x H 910 mm
Shipping dimensions	L 1,200 x W 910 x H 900 mm

Subject to technical changes



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0
Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com